






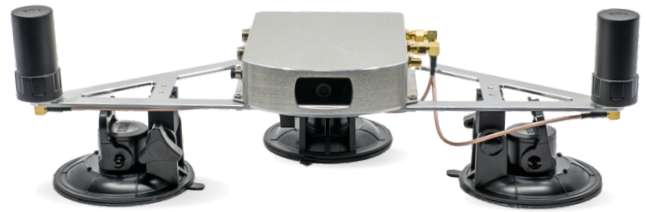

Vision - RTK 2

Starter Kit

FIXPOSITION

- ▶ Real time precise global positioning.
- ▶ Off-the-shelf solution, no internal development.
- ▶ Lightweight solution for all types of platforms.
- ▶ Industry standard connectors.







Item	Image	Description
Vision-RTK 2 Sensor		113 x 130 x 30 mm, waterproof housing, 420 g, dual RTK receivers.
Helix GNSS Antenna		2 High precision GNSS antennas.
Wi-Fi Antenna		2.4GHz, 5GHz, Bluetooth, Wi-Fi, WLAN, Zigbee.
Test Mounting System		3 Suction cup mounts, 1 aluminium plate, 2 GNSS SMA cables, screws, 35 cm base line.
Ethernet Cable		Male M8 - 8pin to RJ45, 3 m.
I/O (Aux) Cable		Male M8 - 8pin to open end, 3 m.



Precise global positioning everywhere™



Item	Image	Description
Battery		7.2V, 3000mAh, NiMH Battery, Tamiya connector.
Battery Charger		100-240 V, 10W, NiMH Charger, Tamiya connector.
Battery Power Cable		Female M8 - 4 pin to Tamiya connector, 0.7 m.
Power Cable		Female M8 - 4 pin to open end 2 m.